

## Références pour commande


| Référence | Entrée     | Sortie                          |
|-----------|------------|---------------------------------|
| H-300     | 0,15 à 60A | N.O., Solid-state 1.0A@30VAC/DC |
| H-900     | 1,5 à 200A | N.O., Solid-state 1.0A@30VAC/DC |



## H300



|                    |                                                            |
|--------------------|------------------------------------------------------------|
| Amperage Range     | Fixed 0.15 to 60A                                          |
| Sensor Power       | Induced                                                    |
| Output             | 1.0A@30VAC/DC                                              |
| Insulation Class   | 600VAC rms (UL), 300VAC rms (CE), insulated conductor only |
| Frequency Range    | 50/60Hz.                                                   |
| Temperature Range: | -15° to 60°C                                               |
| Humidity Range     | 10 - 90% RH non-condensing                                 |
| Terminal Blocks    | 16-22 AWG, 7in-lbs                                         |

Do not use the LED status indicators as evidence of applied voltage.

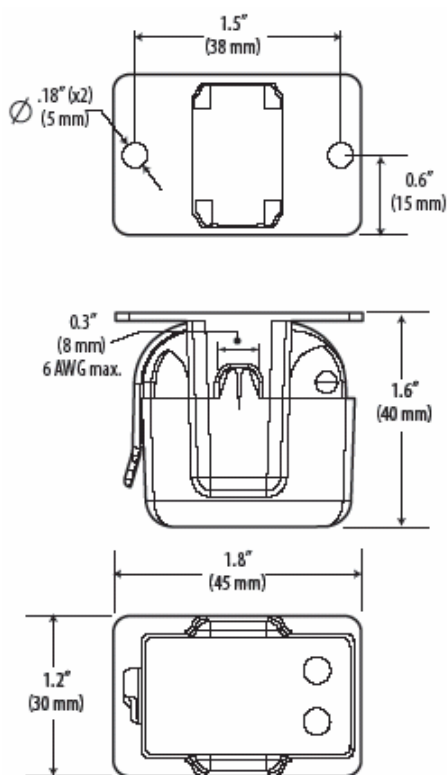

## H900

|                             |                                                 |
|-----------------------------|-------------------------------------------------|
| Amperage Range              | 1.5 to 200A                                     |
| Sensor Power                | Induced                                         |
| Output                      | Digital switch 1.0A@30VAC/DC                    |
| Insulation Class            | 600VAC rms                                      |
| Frequency Range             | 50/60Hz.                                        |
| Temperature Range           | -15° to 60°C. Use min. 75°C insulated conductor |
| Humidity Range              | 0 - 95% non-condensing                          |
| Trip Setpoint (Fixed)       | 1.5A                                            |
| Dimensions... (L x W x H)   | 2.90" (74mm) x 2.58" (66mm) x 1.06" (27mm)      |
| Sensor Hole Size... (L x W) | 1.10" (28mm) x .90" (23mm)                      |

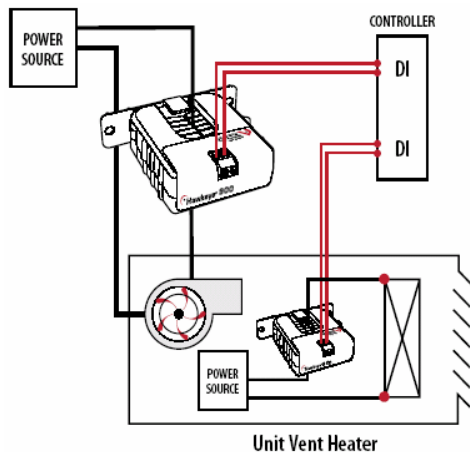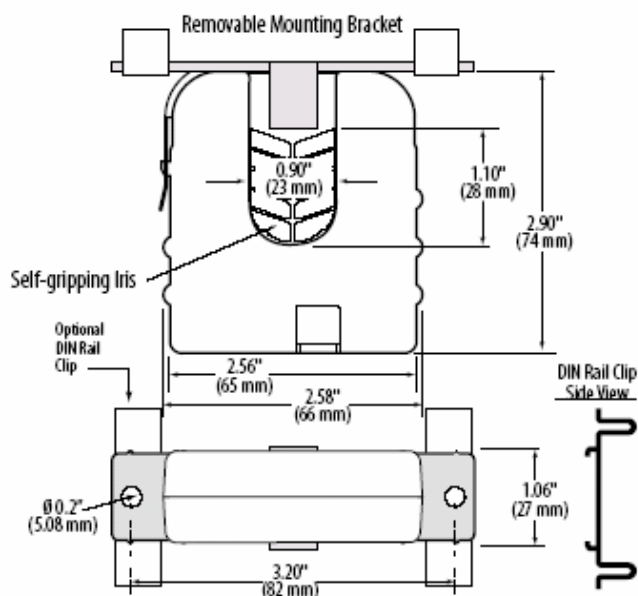

Sous réserve de modifications sans préavis.