

Caractéristiques Techniques

Amperage Range	See ordering table
Output	4-20mA DC
Insulation Class	600VAC rms
Frequency	60Hz. nominal
Temperature Range	-15° to 60°C
Humidity Range	0 - 95% non-condensing
Accuracy	±2%
Response Time	2 sec.
Supply Voltage	12-30VDC Loop powered
Supply Current	30mA (max.)
Dimensions (H721LC & H721HC)	2.93" (74mm) x 2.65" (67mm) x 1.05" (27mm)
Sensor Hole Size	0.75" (19mm) Diameter
Dimensions (H921)...(LxWxH)	2.90" (74mm) x 2.58" (65mm) x 1.04" (26mm)
Sensor Opening Size (H921)...(LxW)	1.10" (28mm) x 0.90" (23mm)

MODEL	AMPERAGE RANGE	OUTPUT TYPE
H721LC Solid-Core	0-10/20/40A	4-20mA, loop powered
H721HC Solid-Core	0-50/100/200A	4-20mA, loop powered
H921 Split-Core	0-30/60/120A	4-20mA, loop powered




H921




H721

Dimensions


H721LC & H721HC

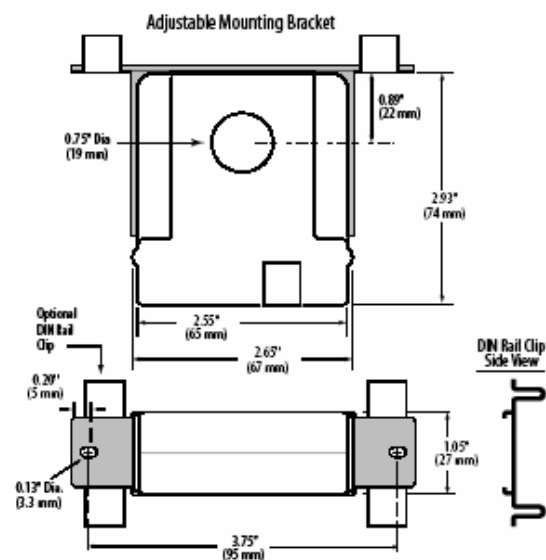

H921

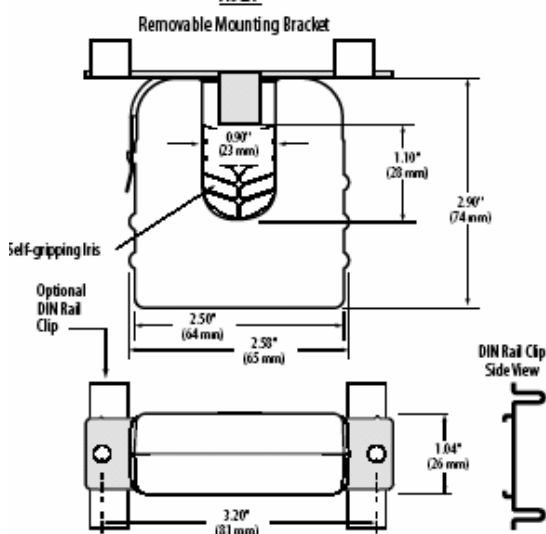

Application

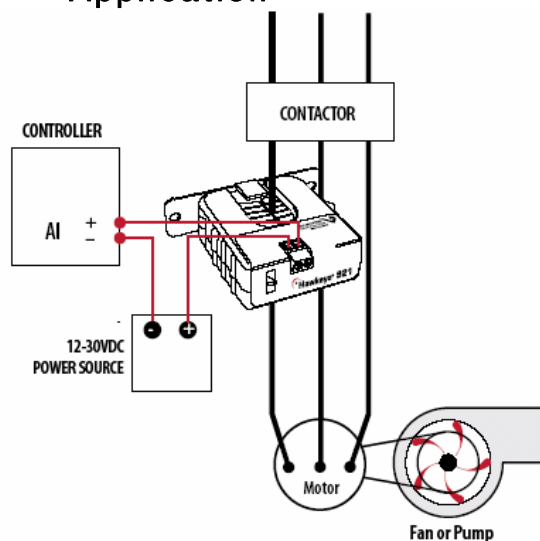

Sous réserve de modifications sans préavis.